




VL130 ECO



N#											
	mm	in.	mm	in.	kg/m	lb/ft					
7.5	202	8	9,50	12/32	2,23	1,50	9.00	10.00	-	-	-
8.0	210	8 1/4	9,50	12/32	2,33	1,56	9.00	10.00	-	-	-
9.0	218	8 5/8	9,50	12/32	2,41	1,62	9.00	10.00	11.00	-	-
9.5	226	8 7/8	9,50	12/32	2,51	1,68	275	10.00	11.00	-	-

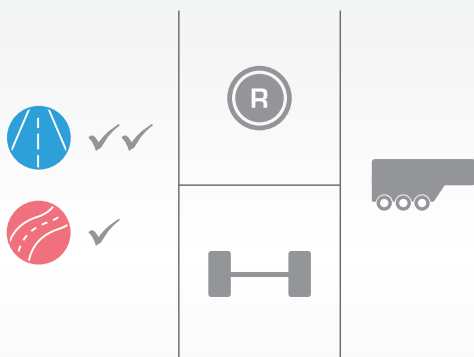

Verificado pelo programa Smartway | Baixa resistência ao rolamento | Baixa geração de calor
Smartway Verified | Low Rolling Resistance | Low heat generation
 Autenticada por el programa Smartway | Baja resistencia al rodamiento | Baja generación de calor
Verificato dal programma Smartway | Bassa resistenza al rollio | Bassa generazione di calore
 Authentifiée par le programme Smartway | Faible résistance au roulement | Faible génération de chaleur
Smartway bestätigt | Geringer Rollwiderstand | Geringe Wärmeentwicklung